





UP1 Series Power Beam MG.DZZ35-2 Side Screen Assembly Instructions

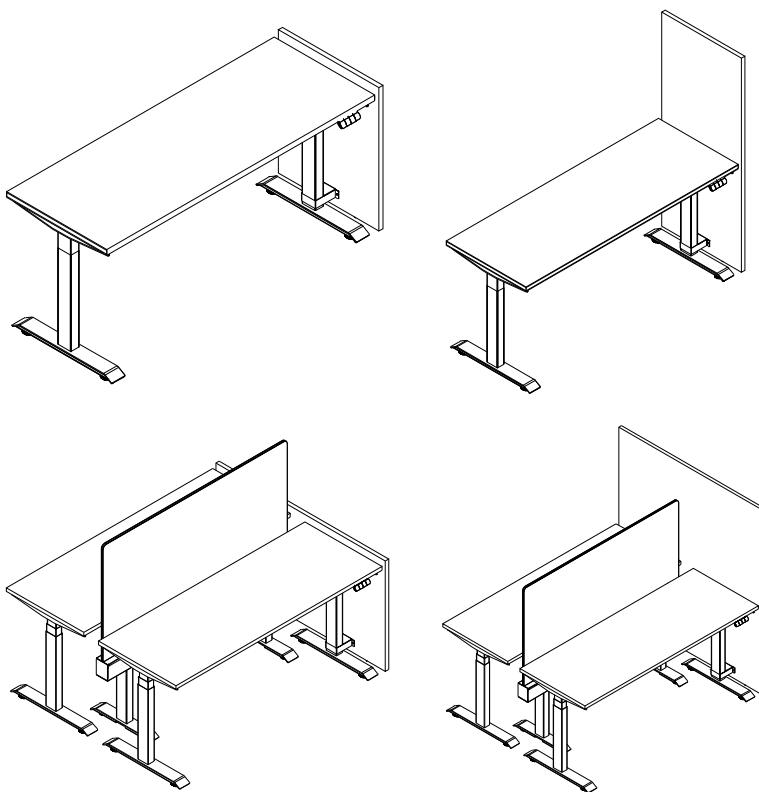


This manual is applicable to the installation of the MG.DZZ35-2 side screen
(width: 600/750/1314/1614mm, height: 750/1350mm).

Please read this manual carefully and store it properly before use.


Assembly precautions

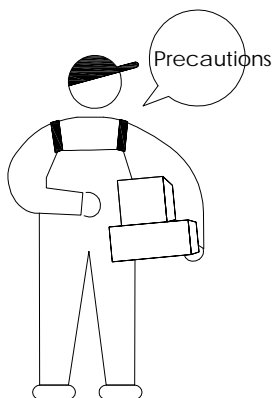


- ❶ Handle gently and put the contents on a padded area

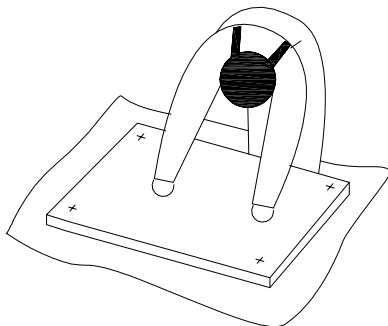

- ❷ Moving the product safely requires more than two people




- ❸ Please contact us freely if you have any questions

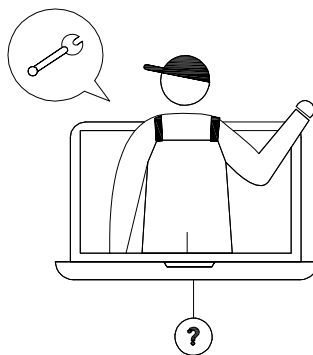






Drawings indicate the components of the product, some of which are considered critical components.
If the part shown here does not match your order, please contact us at +86-400-8600-666.

Exploded diagram

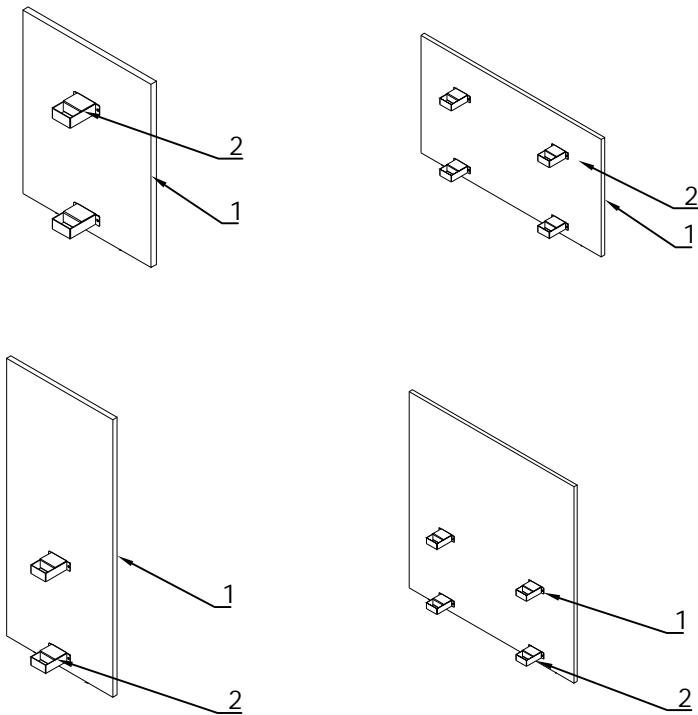

ITEM	PART NAME	QTY
1	side screen	1
2	wraparound bracket 1+2	2/4


Parts listing

A1			A2			A3		
								
wraparound bracket 1	120.5*121*43	2/4	wraparound bracket 2	120.5*121*43	2/4	round head hex screws	M6*16	4/8
B			C					
								
adjustable foot	M6*22	2	hex key	4#	1			

Adjustable Foot Installation;

1


- 1.Lay down side screen 1, taking care to prevent damage during placement.
- 2.Rotate adjustable foot B into the pre-embedded nut. Do not use a power drill to prevent over-tightening or damage to the components.

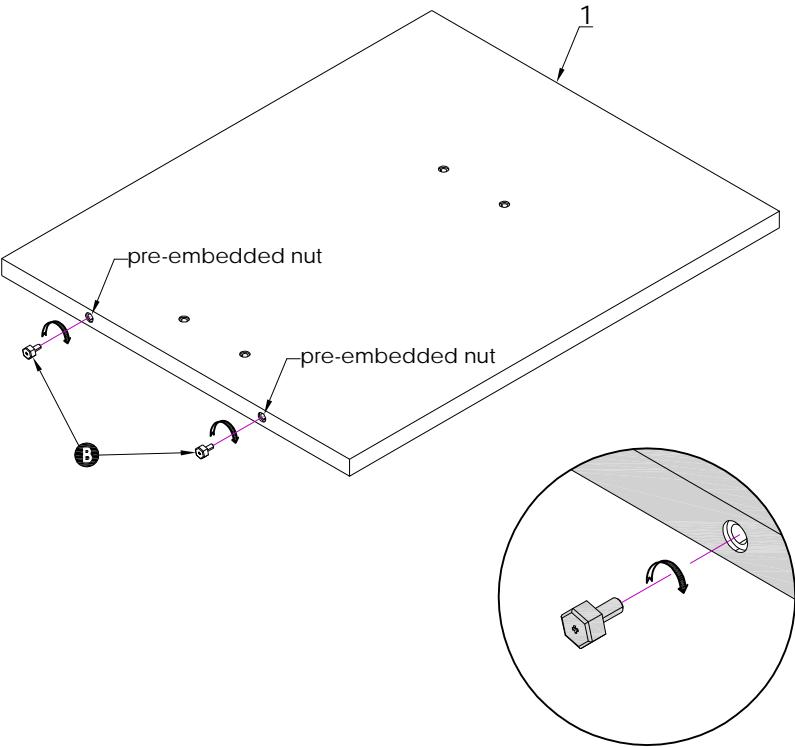

Side Screen - Adjustment and Pre-Fixing;


2

- 1.Place the side screen vertically, ensuring that the side of the adjustable foot to the ground and the side with holes towards the tabletop. Adjust the adjustable foot to align the upper edge of the side screen with the lowest height of the tabletop
- 2.Insert wraparound bracket A1 along the inside of the tabletop, securing it onto the lifting column from the inside out.
- 3.Align the component holes with the side screen holes, and use M6*16 round head hex screws for
- 4.The screws do not need to be overtightened; just ensure wraparound bracket A1 will not slide do

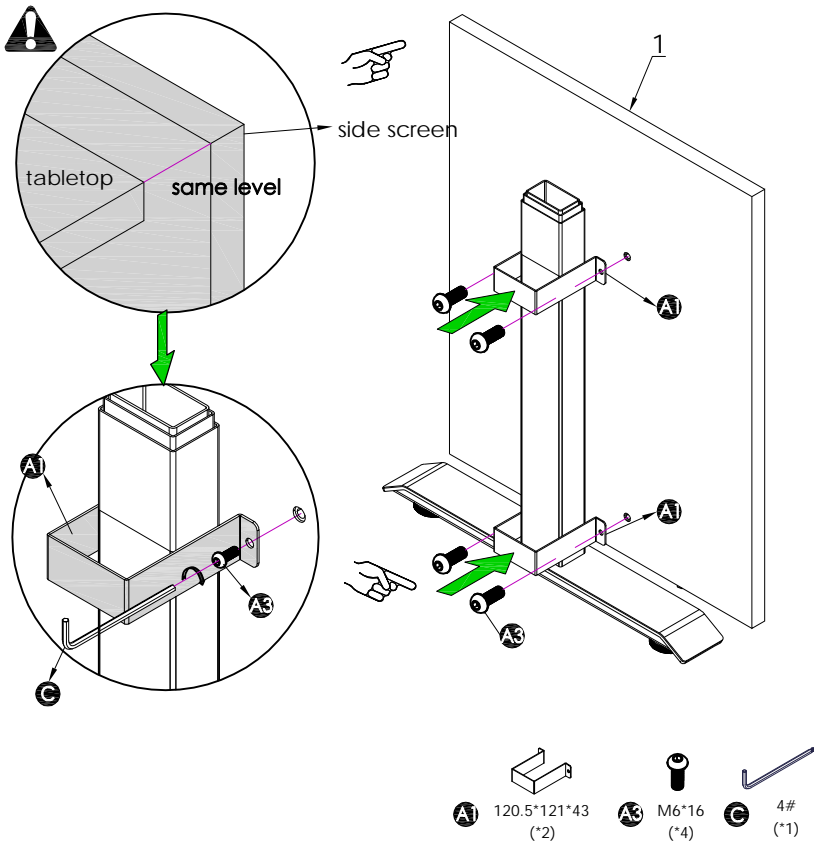

3


Insert wraparound bracket 2 from the top into the gap between wraparound bracket 1 and the lifting column. Please note the directions.

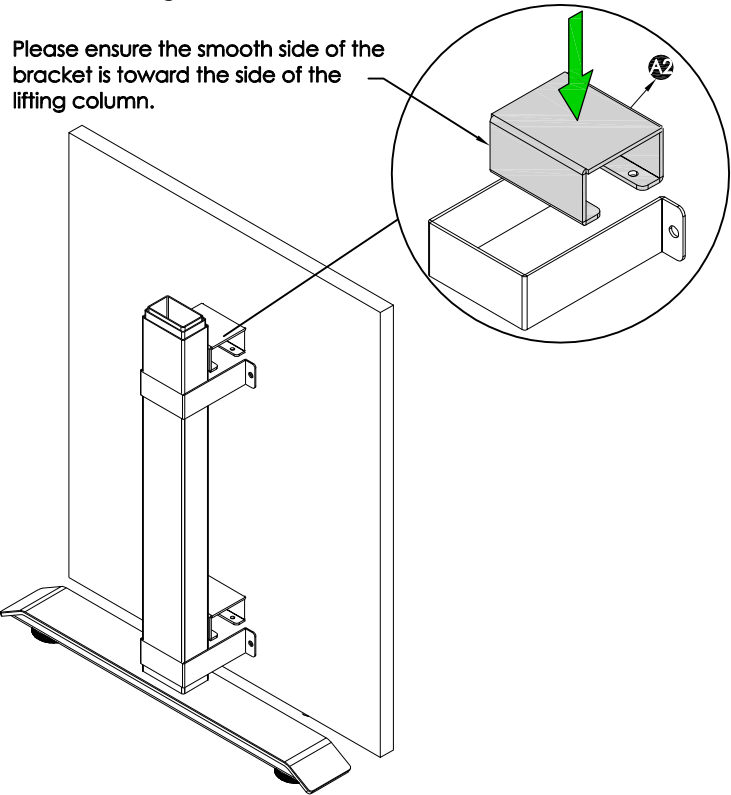





Side Screen - Fastening;

4

Tighten and secure the screws.

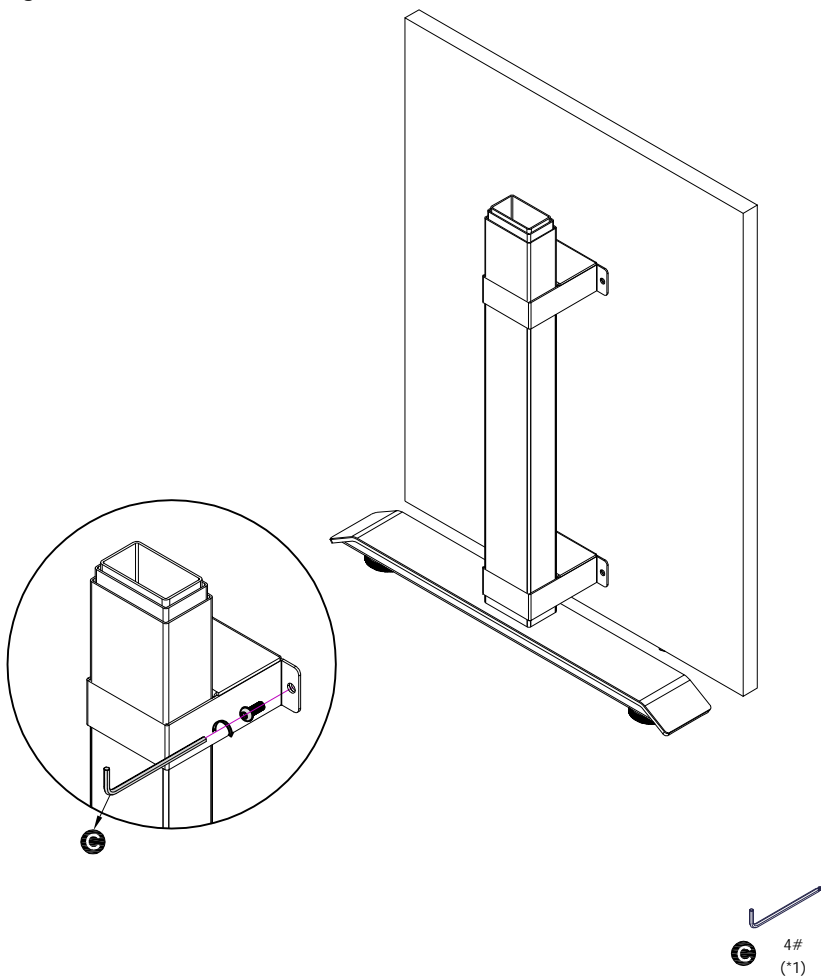


Done!

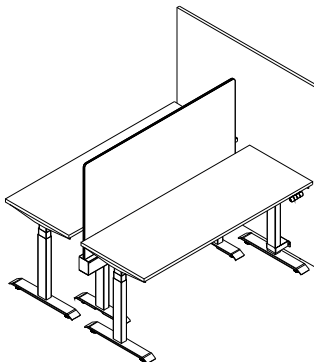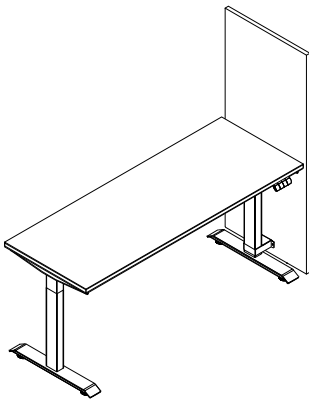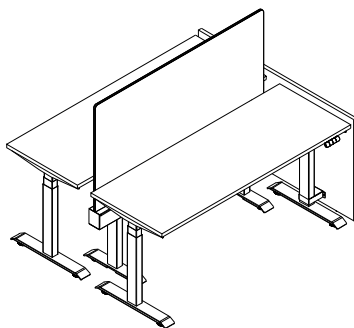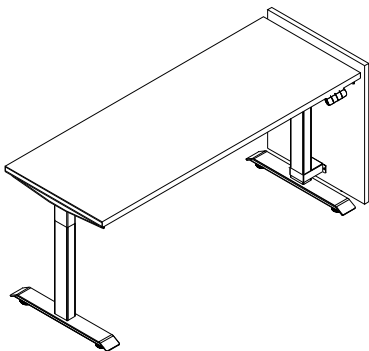


Acceptance precautions




① Keep the product surface clean

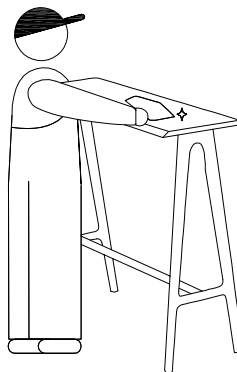

② Keep the installation site clean



③ Acceptance of customer delivery





Headquarters & Experience Center-Sunon Technological Innovation Park
No.1666 Zhixing Road,Xiaoshan District, Hangzhou, Zhejiang, China
TEL: +86 571 8816 6666 PC: 311200
www.sunonglobal.com



Firm's Website



Wechat account