




# Mall Series Bullet Conference Table


## DMA77-2.180120

### Assembly Instructions

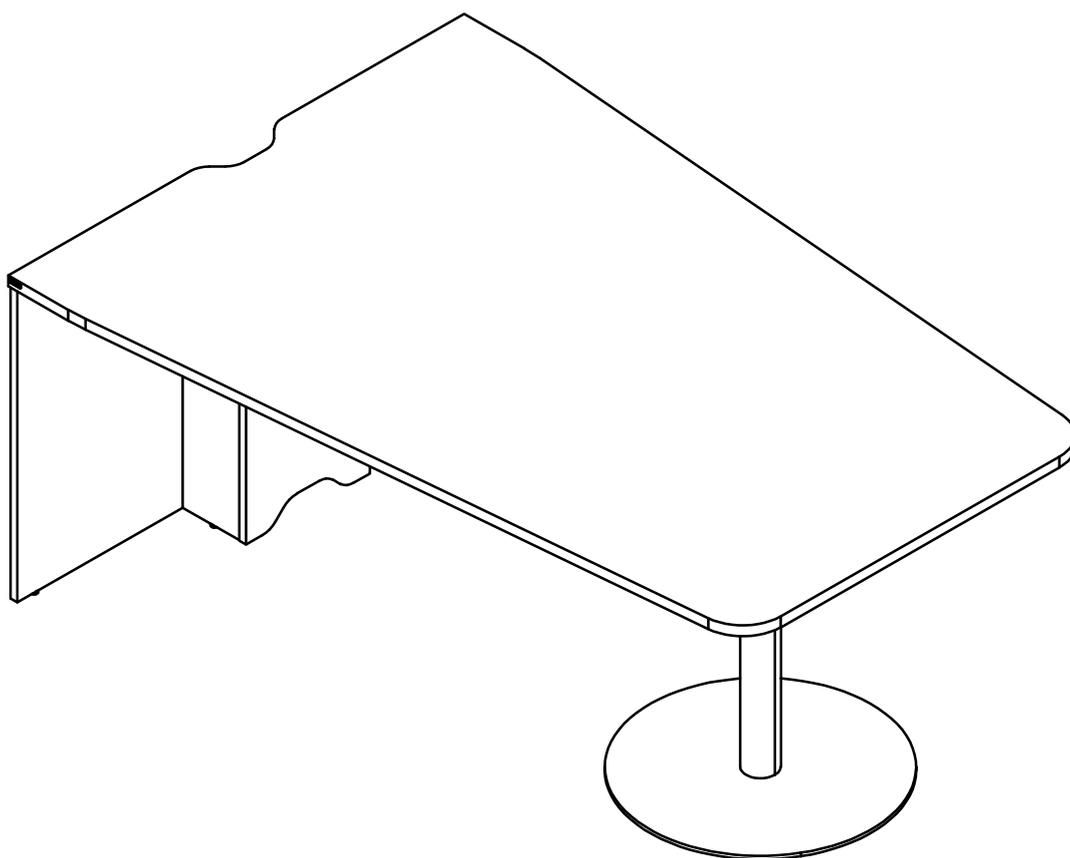


This instruction is apply to the assembly of DMA77-2.180120  
Please read all this instruction before assembly and save it carefully.


# Installation Notes

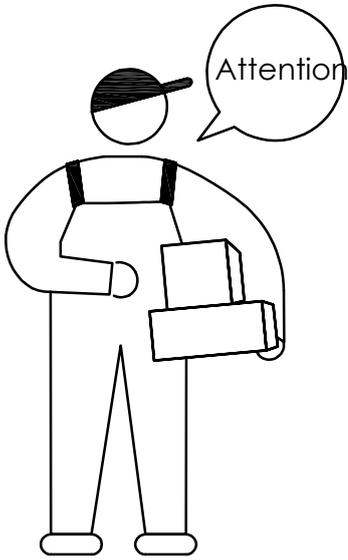


① Handle with care and use protective padding when necessary.

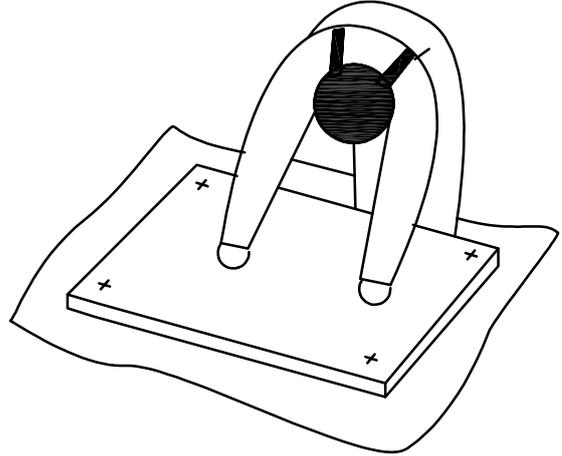

② Secure transportation requires assistance from two persons at least

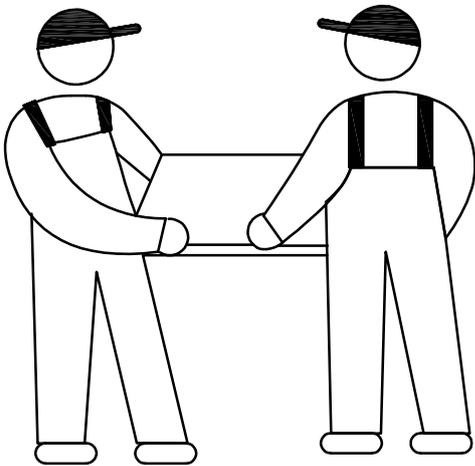

③ For any inquiries, please contact Sunon.

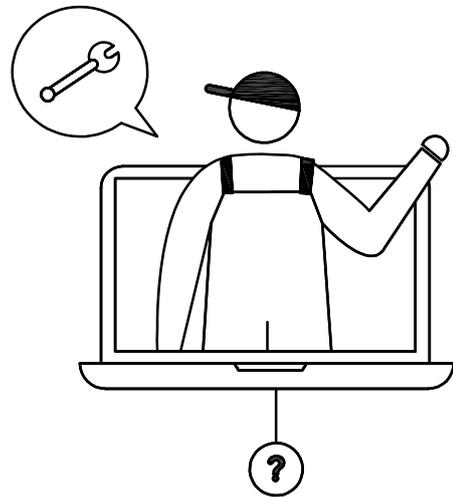


---

Drawings indicate the components of the product, some of which are considered critical components. If the part shown here does not match your order, please contact us at 949-337-8838





---

Exploded Diagram

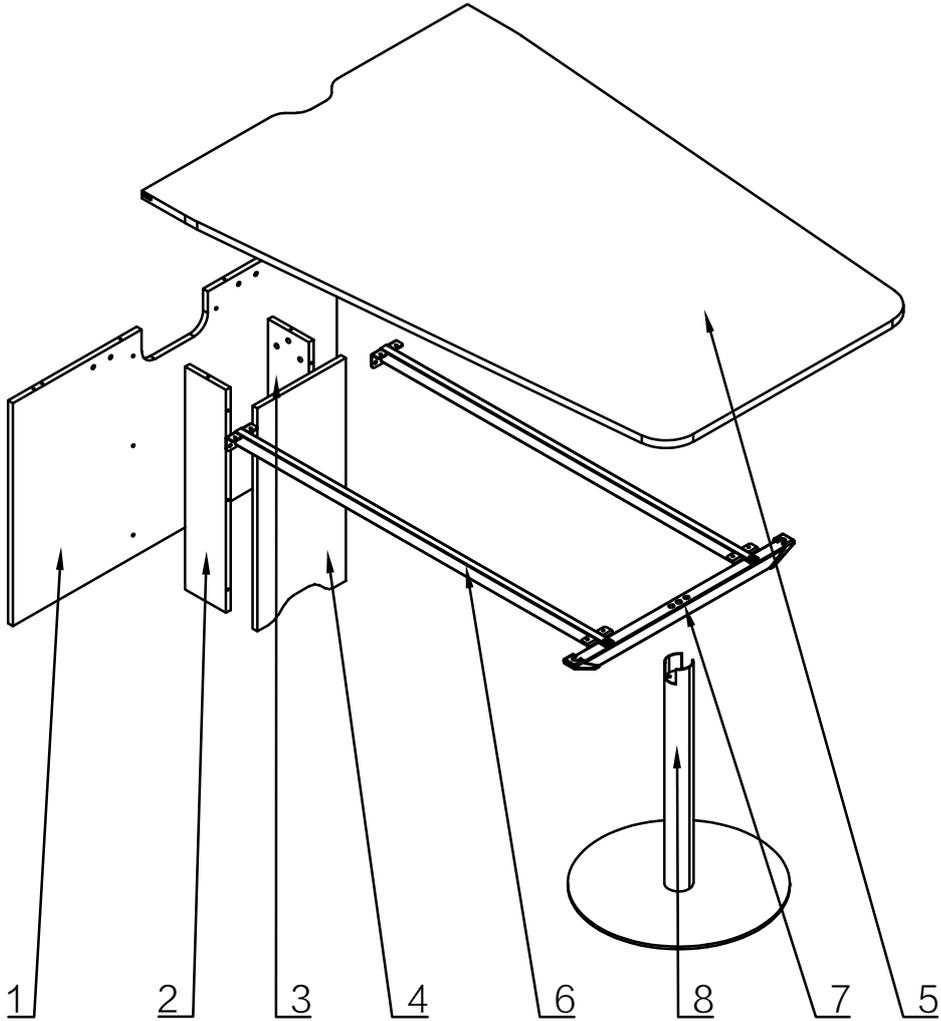

Number	Name	Quantity
1	side panels	1
2	front panel	1
3	back panel	1
4	cover panel	1
5	tabletop panel	1
6	support rod	1
7	cross beam	1
8	table disc base	1

# Parts listing


<b>A</b> 	<b>B</b> 	<b>C</b> 
new cam lock    Ø15*45    10	panel connectors    49*26*15    4	adjustable feet    M6*22    4
<b>D1</b> 	<b>D2</b> 	<b>E1</b> 
hexagonal round-head screws    M8*30    3	hexagonal flat-head screws    M8*30    3	cross flat round-head screws    ST5.5*20    8
<b>E2</b> 	<b>F</b> 	<b>G</b> 
cross flat-head screws    ST4*20    16	hex wrench    4#    1	LD rod iron plates    90*48*30    4
<b>H</b> 	<b>I</b> 	<b>J</b> 
hexagonal flat-head screws    M6*16    6	hexagonal flat round-head screws    M6*12    20	40 end caps    44.5*86.5*49    2
<b>K</b> 	<b>L</b> 	
hex wrench    5#    1	corner brace    55*30*25    4	

---

Attach the adjustable feet to the bottom of the side panels and back panel.

---

# 1

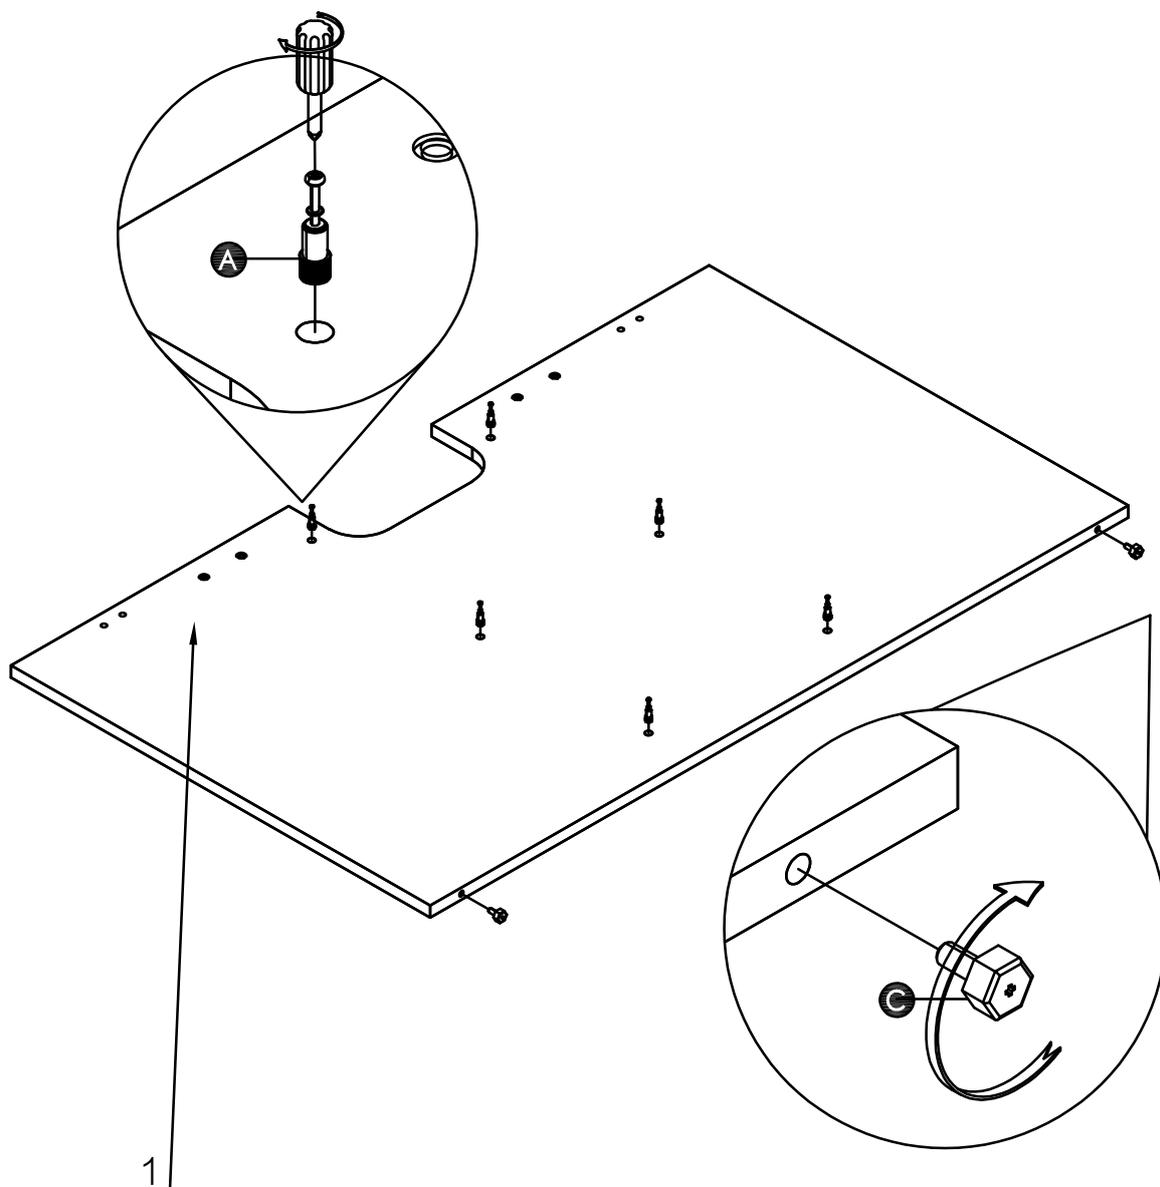


- C** M6\*22 (x2)
- A** Ø15\*45 (x6)

---

Install the panel connectors on the cover panel and front and back panels as shown in the diagram.

---

# 2

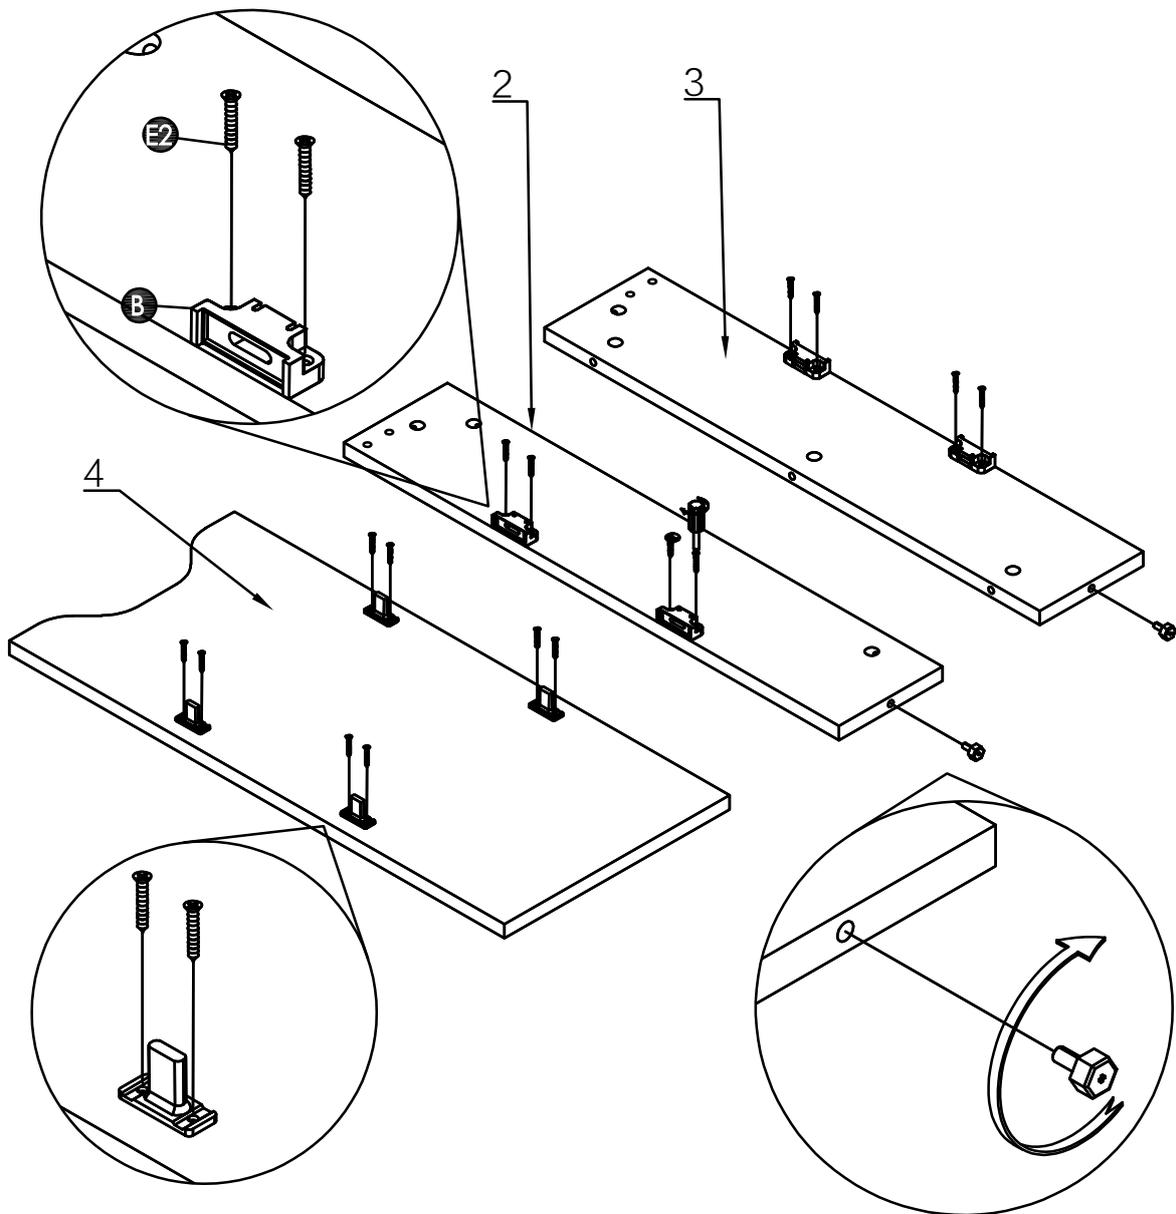


-   
**E2** ST4\*20  
(x16)
-   
**C** M6\*22  
(x2)
-   
**B** 49\*26\*15  
(x4)

---

Attach the front and back panels to the side panels.

---

# 3

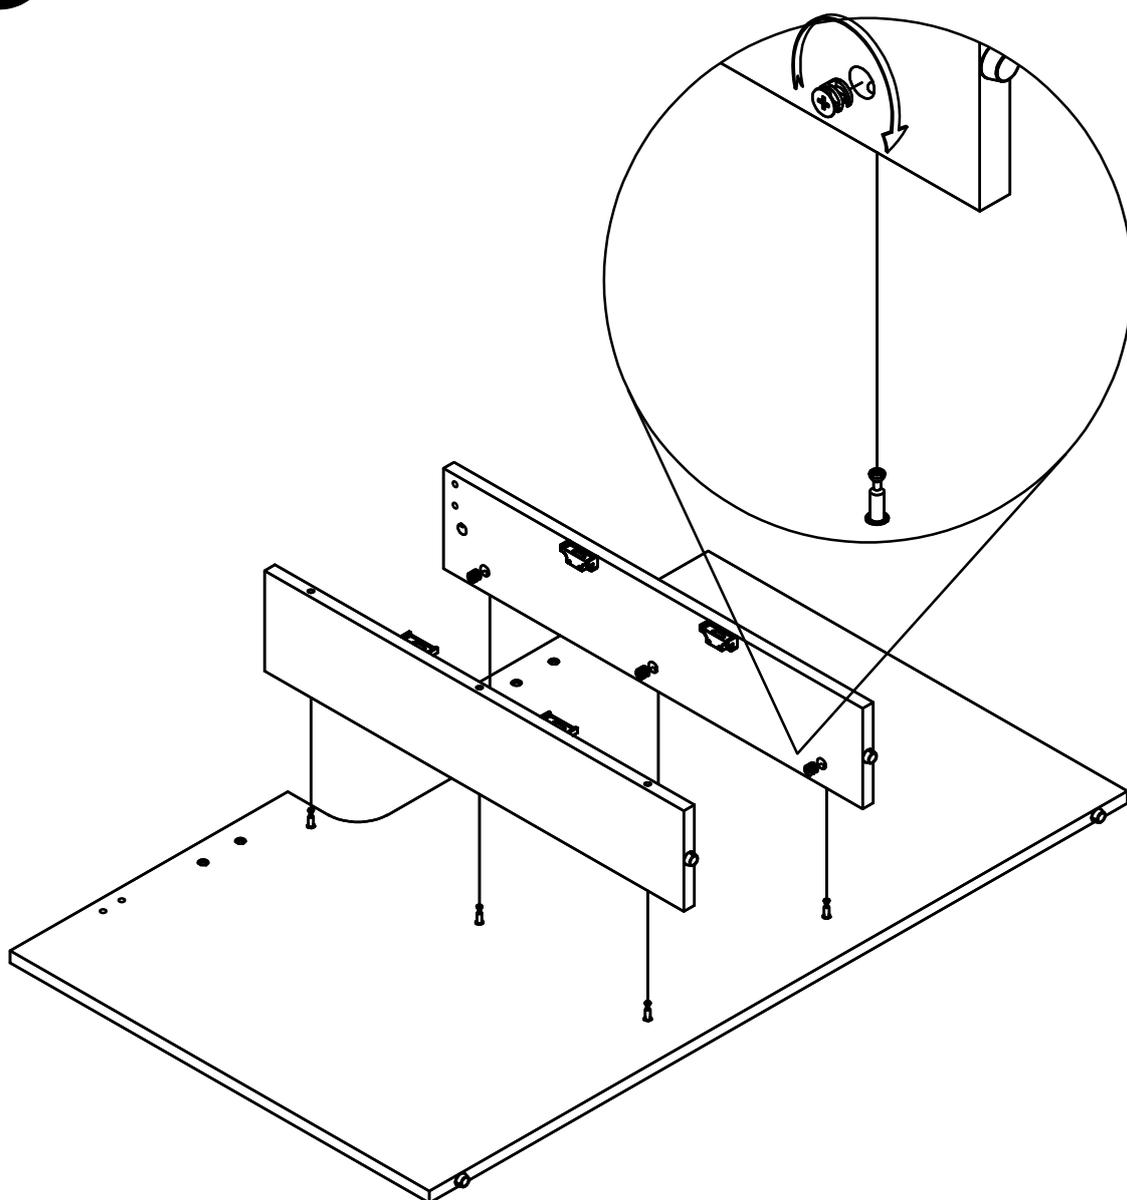


---

Install the LD rod iron plates onto the support rod. Secure the plates and rod using hexagonal flat-head screws.

---

# 4

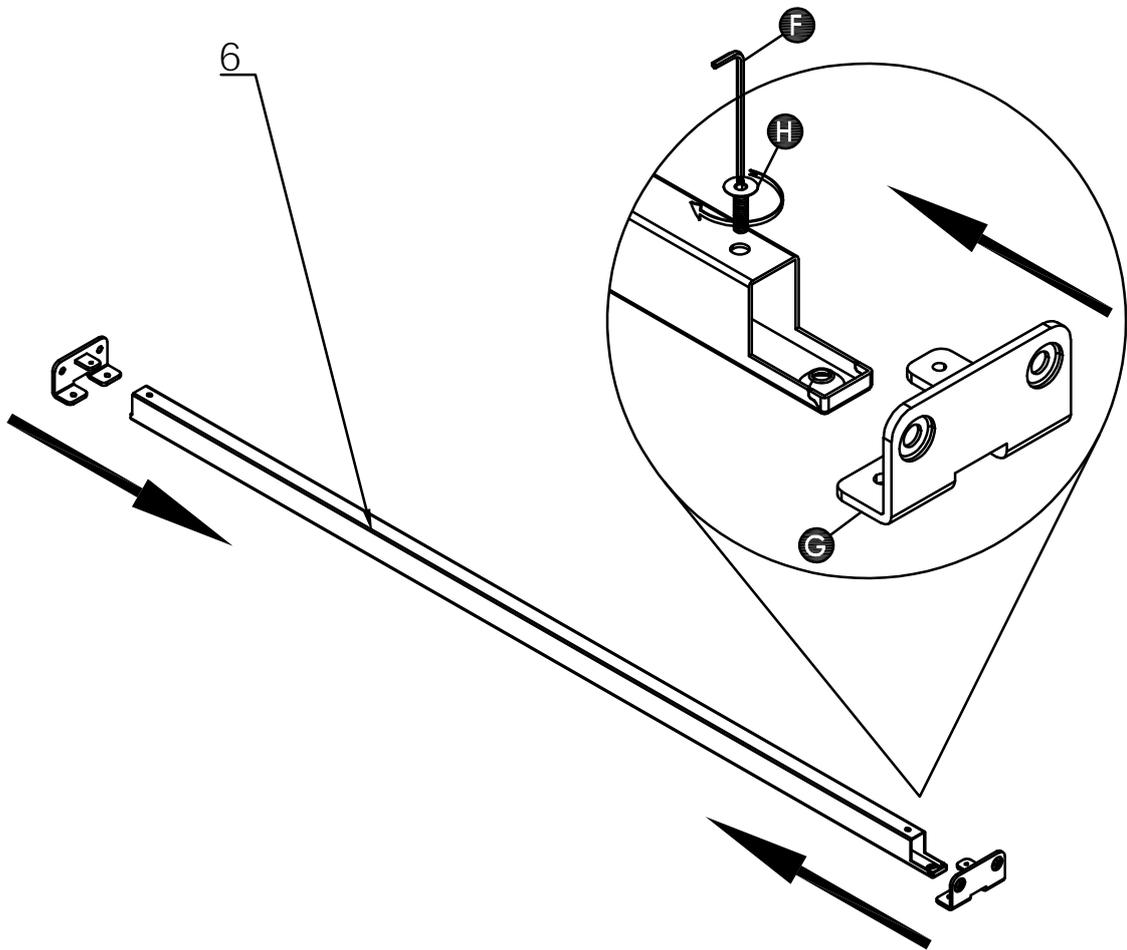


- F** 4# (x1)
- G** 90\*48\*30 (x4)
- H** M6\*16 (x4)

---

Assemble the disc base and attach the cross beam to the disc base.  
Cover with the end caps.

---

# 5

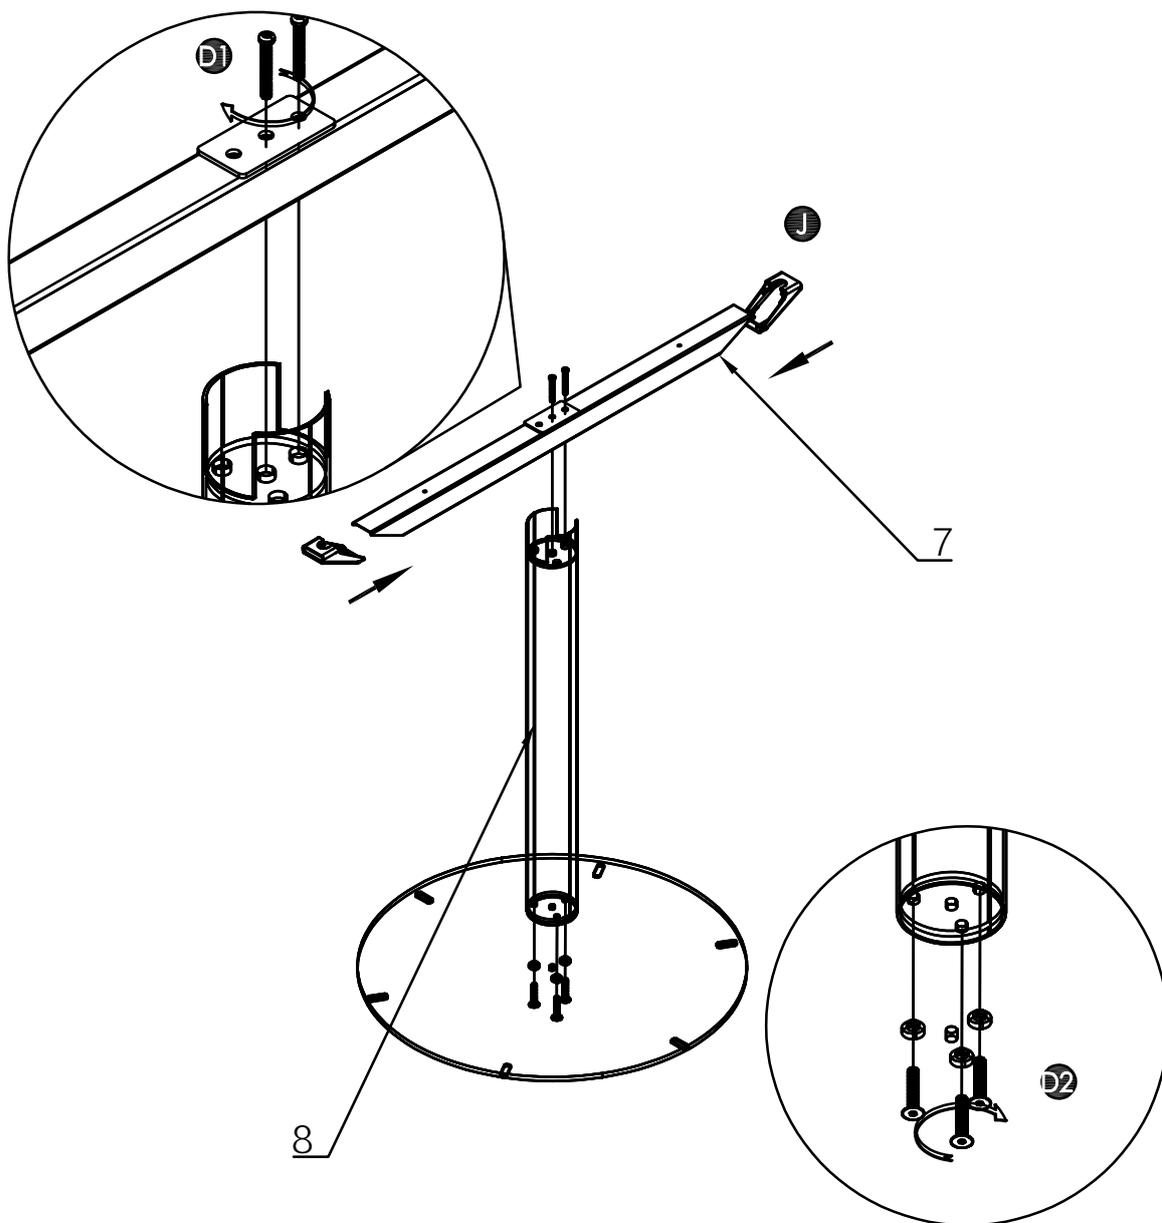


- |   |   |   |
|---|---|---|
|  |  |  |
| <b>D1</b> M8*30<br>(x2)   | <b>D2</b> M8*30<br>(x3)   | <b>J</b> 44.5*86.5*49<br>(x4)   |

---

Install the support rod.

---

6

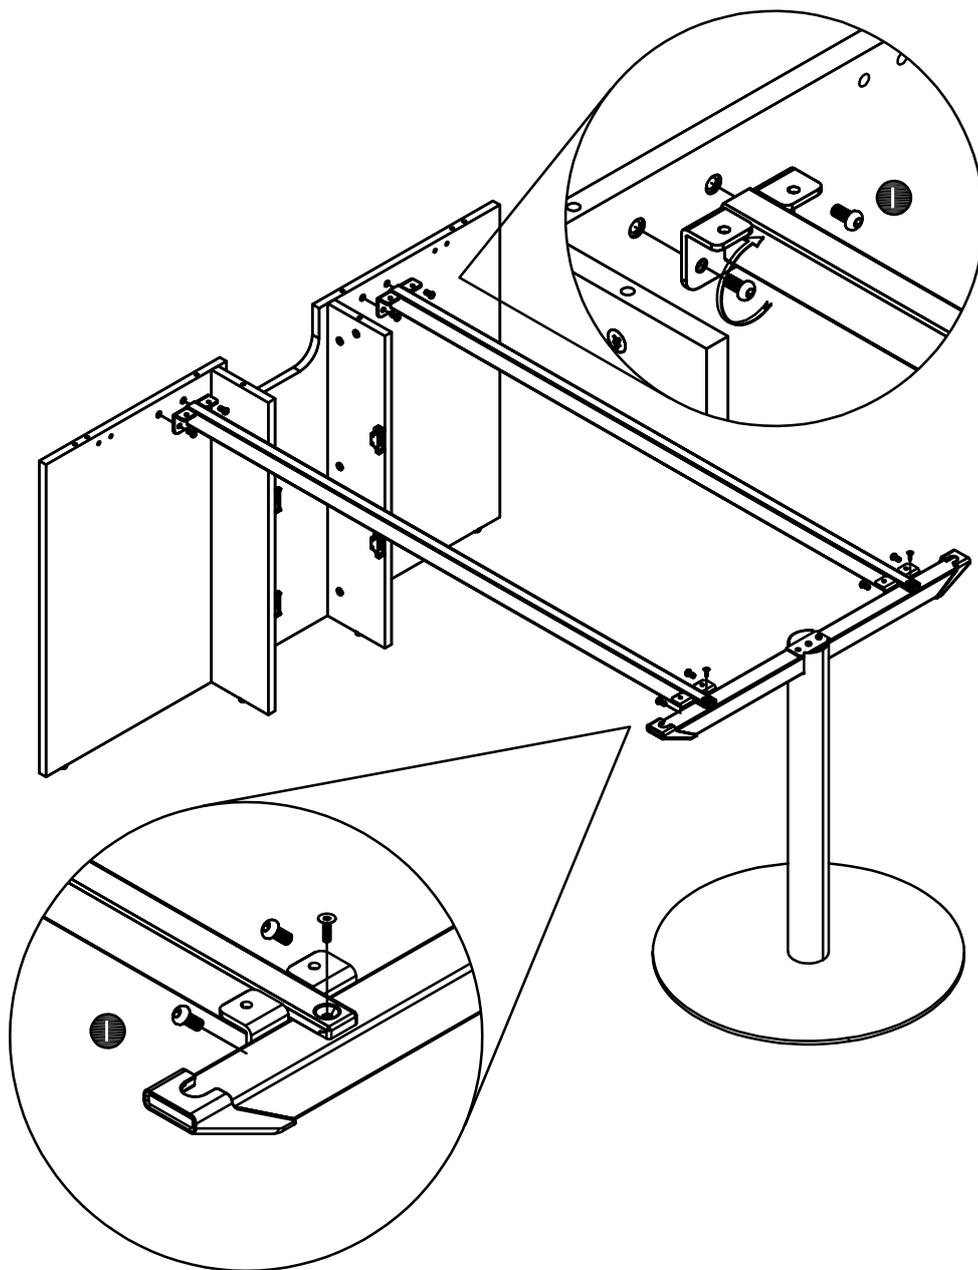


 M6\*12  
(x8)

---

Install the 3-in-1 cam lock rods on the tabletop panel.

---

# 7

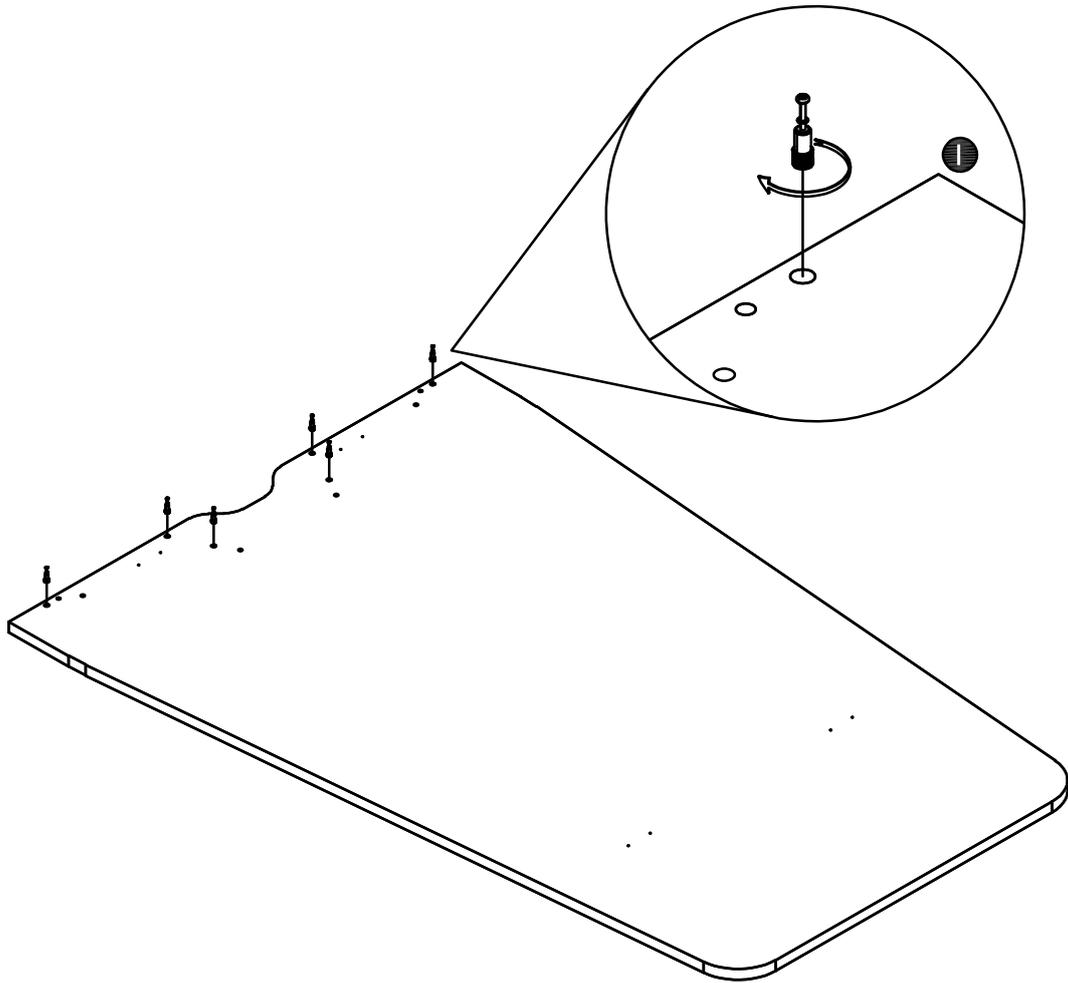


  
A Ø15\*45  
(x6)

---

Attach the tabletop.  
Secure the tabletop and support rod with self-tapping screws.

---

# 8

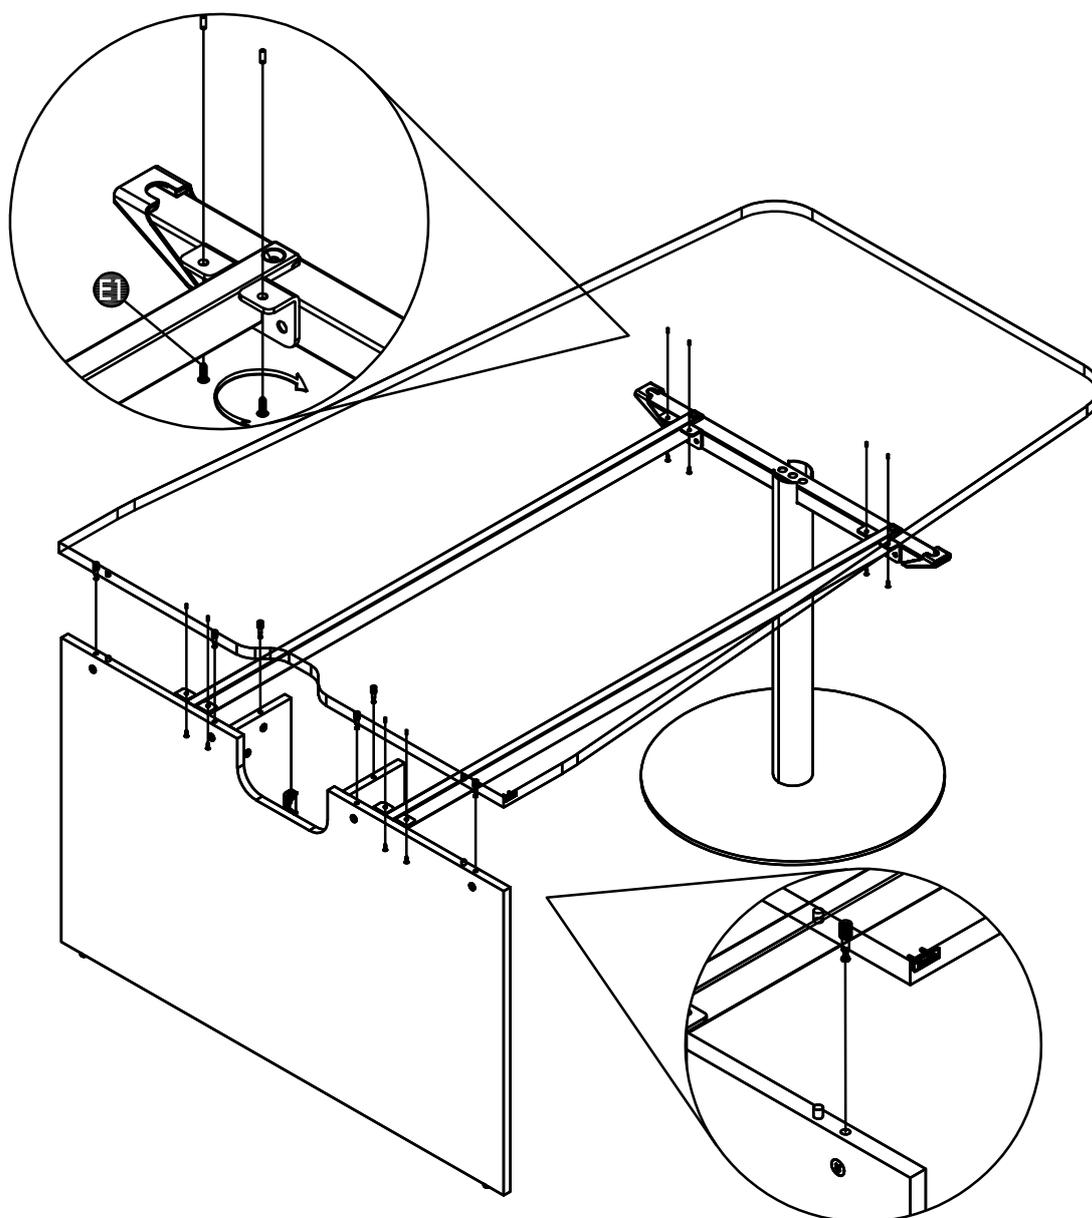


**E1** ST5.5\*20  
(x8)

---

Install the cover brace.

---

9

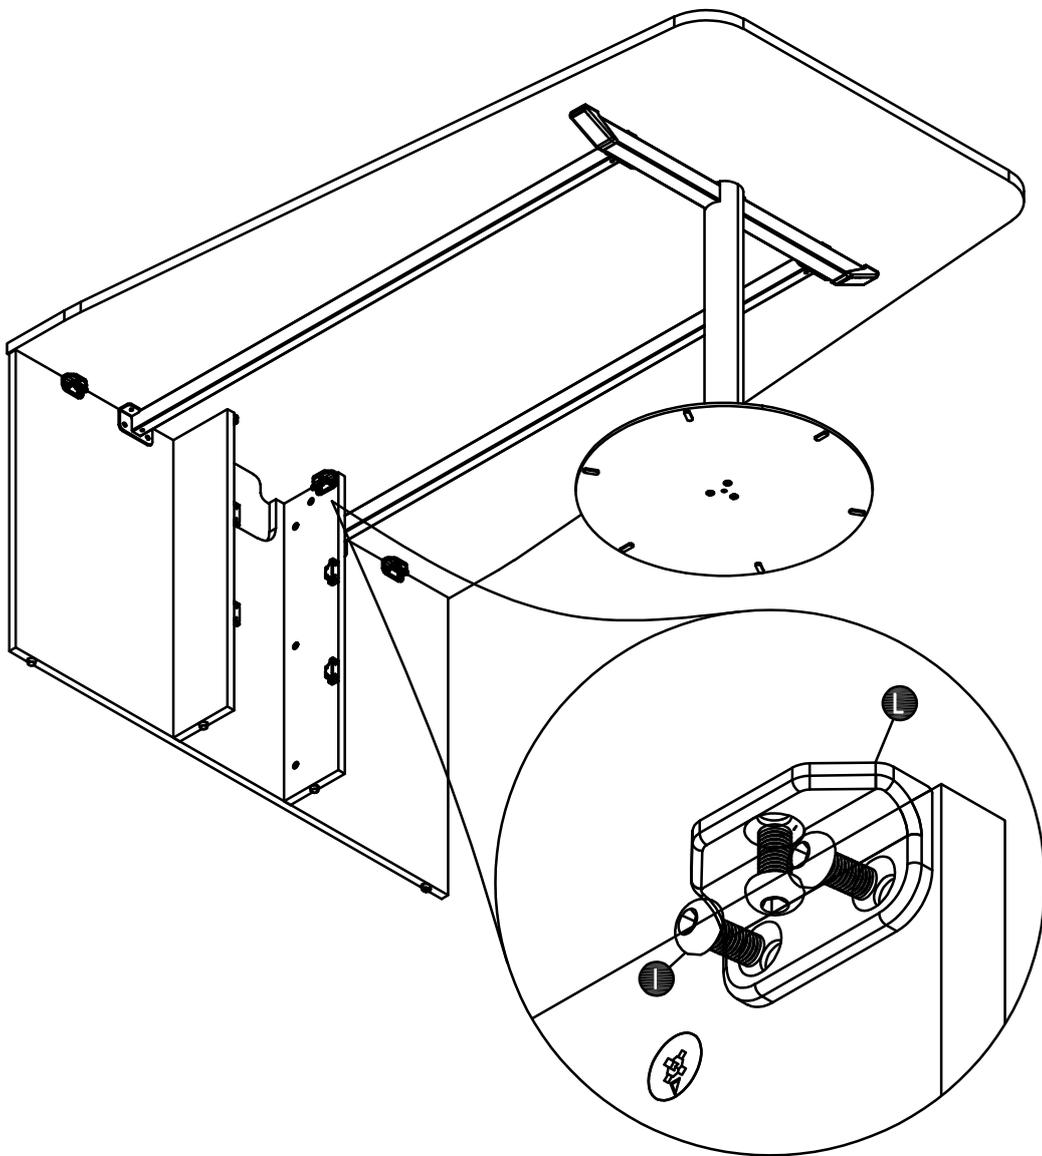


-  M6\*12 (x12)
-  55\*30\*25 (x4)

---


Install the cover panel.

---

# 10

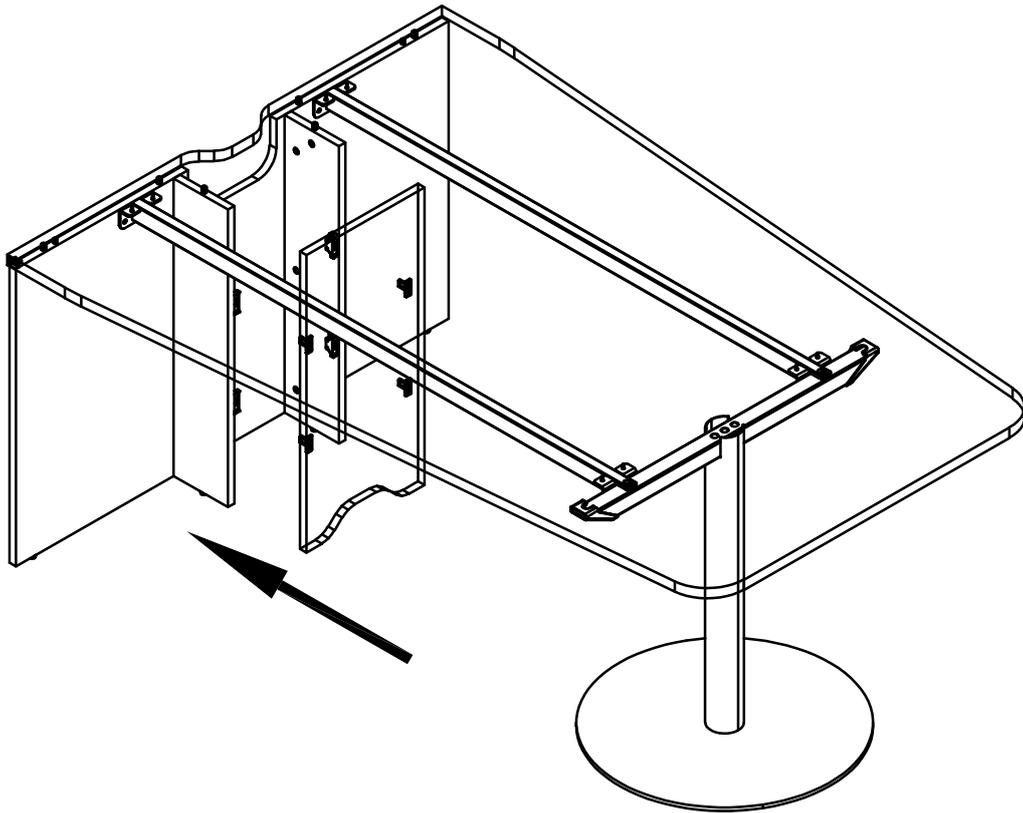


**Done!**

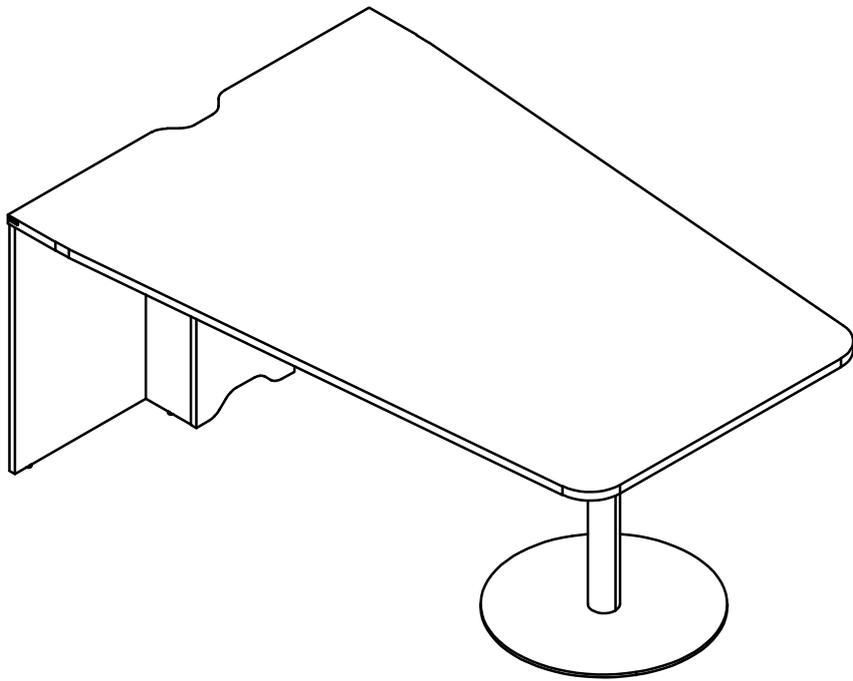

# Acceptance precautions




1 Keep the product surface clean

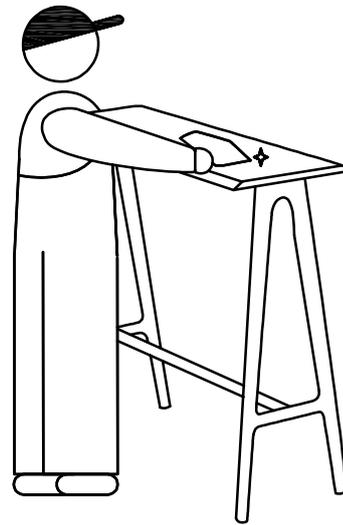

2 Keep the installation site clean



3 Acceptance of customer delivery

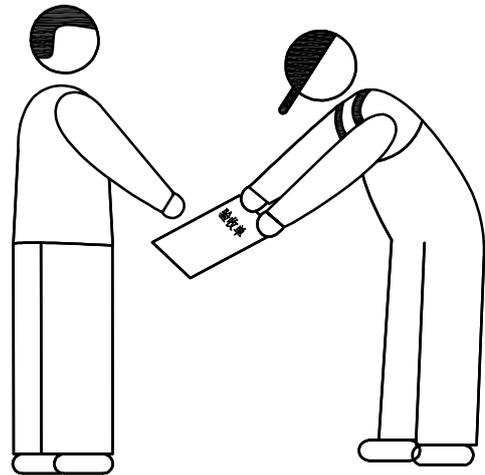

# Sunón

U.S. Headquarter + Experience Center  
311 N Green Street, Suite 900, Chicago IL

[us.sunonglobal.com](http://us.sunonglobal.com)

833-337-8666

[order.us@sunonglobal.com](mailto:order.us@sunonglobal.com)



Material Color [us.sunonglobal.com](http://us.sunonglobal.com)