

Instruction for Use

This product mainly uses artificial board as base material and natural wood veneer overlaying the surface finishing. Some of the lines and the framework use solid wood processing and hardware for connection and for overall plate structures. This product meets the standard GB/T 3324-2017, which defines that its formaldehyde release quantity and soluble heavy metals (paint) limited are in accordance with national standards.

Please read and follow the guidance of the instructions for proper use and maintenance of your furniture so as to maintain their sound condition after many years of use. Please pay attention to the following instructions when you use your furniture:

- Don't locate the furniture directly under sunlight or anywhere near air-conditioners or heaters, because ultraviolet ray will cause color fading in the surface of furniture, peeling-off of strips or even deformation.
 - Don't incline the furniture towards any direction, or the connectors will be loosened or even broke off.
 - Don't place hot or frozen objects on the furniture directly, or it may cause color fading in the surface of furniture and unmovable stains.
 - Don't move objects right on the surface of the furniture, or it may scratch the surface.
 - Please lift the furniture a little bit off the ground when it needs to be moved as a whole so as to avoid the damage to the bottom part or the connectors of the furniture.
 - If you need to put heavy or hard objects on the furniture, we advice you to put a soft cloth mat on the surface for protection purpose.
 - Do not put plastic or rubber items on the surface of the furniture for too long. The chemical composition may cause damage to the furniture.
 - Please use soft cotton cloth or feather duster to remove the dust. Please use special furniture cleaner when remove oil or other stains. Please avoid chemical or acid cleaner.
 - If not in use for a longer period, the furniture should be covered with dust cover, stored indoor in a dry, dark and ventilated environment.
- If your product has been updated, please leave the old version to the qualified recycling company or enterprises involved in recycling business.



Trouble Shooting

Problems	Analysis	Solutions
The hinge is loose.	The screws are loose.	Tighten the screws
The door cannot be opened smoothly.	Furniture is not levelly put or there is a problem with hinges.	Put the furniture evenly on the floor or adjust the hinge, and add little lubricating oil.
Drawers cannot be opened smoothly.	Overloaded, and result in lack of lubricating oil.	Reduce the weight and add some lubricate oil on rails.
Desktop whitened.	Resulted from high temperature.	Cover the white place with a wet towel until the color is back to normal.
The connector is loose.	The eccentric connection part is loose.	Tighten the connection part.
Shelf distorts.	Overloaded.	Reduce the weight, and assemble the shelf board reversely.


Assembly Instruction

- Please decide the location of your furniture before installation to avoid moving them in a large scale after it is completely installed.
- Do not place your furniture in dark and damp or hot and dry environment.
- Please check the number of packaging bags, view the product installation manual and verify the product structure.
- Please check the direction of each part when unpacking them before installation.
- Please install the product patiently. Make sure that each part is in the right position. Furniture is easy to assemble, but it takes patience and carefulness to do a meticulous job.
- Please check the stability of the furniture after installation. Shake your furniture gently to confirm whether it is level with the ground or whether the screw is tight.
- Please keep the furniture unoccupied for a period of time. Open the cabinet and drawer to release residual painting odor.


Attention

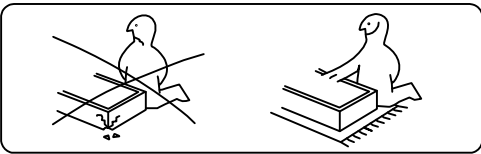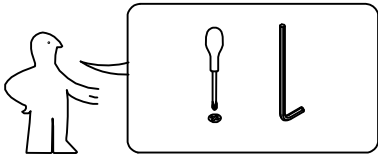

② Handle it with care. Please locate it on a protection layer.

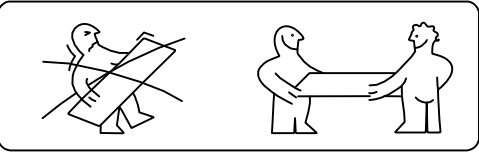

① Move it safely with cooperation.

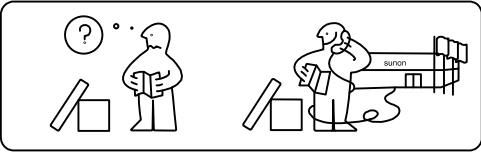


③ If you have any questions, please contact us.

Q/SAYF-BD051V1.0

Sunon

Thank you for choosing Sunon products. Please read the instruction carefully before using.

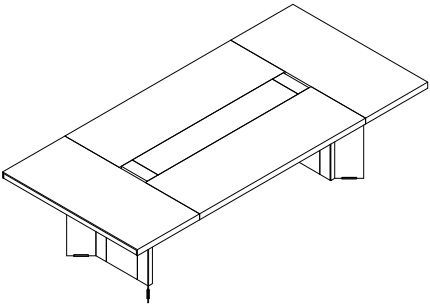

Product Information

Series: Larry
Item: EY78
Name: Meeting Table
Dimension: 2800*1300*750

This product is suitable for office use only, and the decorative accessories is for indoor use only.

Zhejiang Sunon Furniture Manufacture Co., Ltd

Customer service hotline: 4008-600-666
Website: www.sunon-china.com
Headquarters Address: Sunon Central Buisness Building, No. 200 Citizen Street, Qianjiang CBD, Hangzhou, Zhejiang
Manufacturing Base Address: 35th, Ningdong Road, Xiaoshan economic and technological development zone, Hangzhou, Zhejiang
Manufacturing Base Address: 6th Anren Road, Jianshan Haining economic development zone, Zhejiang

Fittings

66*20.5*9 2# Connector 12pcs	66*14.5*9 1# Connector 12pcs	Ø7*6 Hole Plug (right threaded) 12pcs	4# 4# Allen Wrench 1pc	Ø15*32 Three-in-one connector 20 sets
700*145*18 Iron Plate 4pcs	100*13*10 Plastic Leg Pad 4pcs	M6*12 Countersunk Allen Screw 16pcs	56*23*4 Wooden Chip 8pcs	M10*140 Five-in-one Connector 4 sets
M8 Combination Wrench 2pcs	Ø35 Four-in-one cover 8pcs	M6*40 Flat-Head Cross Screw 8pcs	Irregular Shape Leg Support 8 sets	M6*17 Countersunk Allen Screw 24pcs
85*85*18 Socket Bottom Box 4sets				

Step One: connect and fix the boards of the leg part


	66*20.5*9 2# Connector 12pcs
	4# 4# Allen Wrench 1pc
	66*14.5*9 1# Connector 12pcs
	Ø7.6 12pcs Hole Plug

Board of leg part*2

Step Two: connect and fix the bottom board and connecting board of cable box

	Ø15*32 Three-in-one connector 4 sets
	85*8*18 Socket Bottom Box 15sets


Install the socket bottom box:
Fix two ST4*12 screws on the opposite side of the board

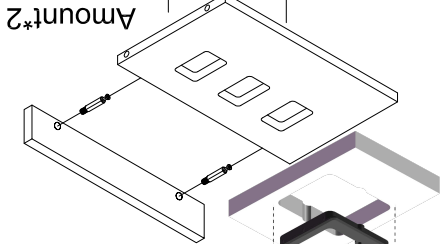

Amount*2

Step Three: connect and fix the connecting boards and bottom board of cable box with two leg boards


	Ø15*32 Three-in-one connector 10 sets
--	---------------------------------------

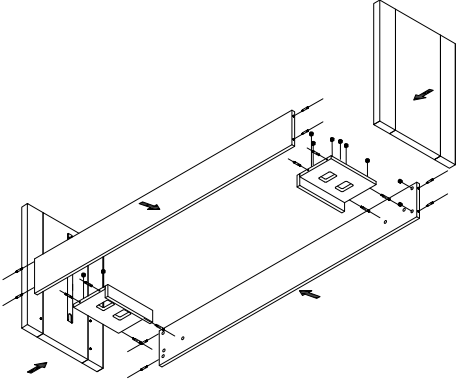

Step Four: assemble the iron plates and plastic leg pad as below picture shows


	200*145*18 Iron Plate 4pcs
	200*13*10 Plastic Leg Pad 4pcs

Iron Plate*4

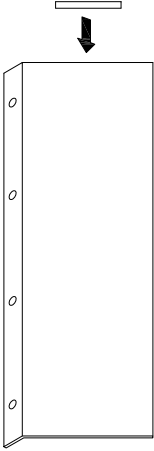



Step Five: connect and fix the iron plates with leg boards

	4# 4# Allen Wrench 1pc
	M6*12 Countersunk Allen Screw 16pcs

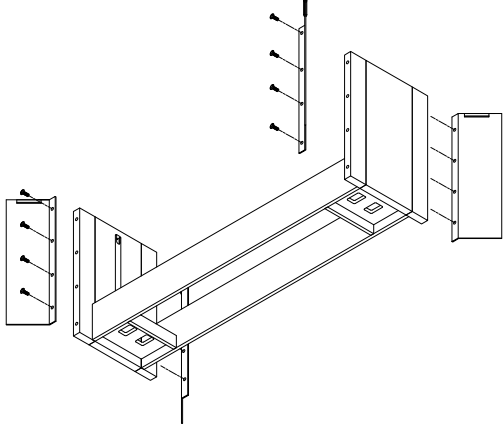

Step Six: assemble and fix the desktop, and cover the five-in-one hole.


	56*23*4 Wooden Chip 8pcs
	M10*140 Five-in-one Connector 4 sets
	M8 Combination Wrench 2pcs
	Ø35 Four-in-one Cover 8pcs

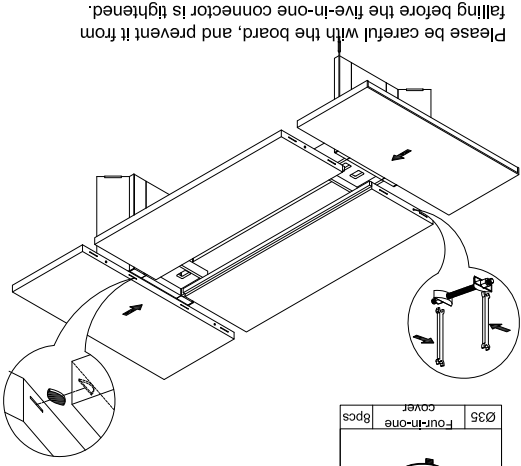

Please be careful with the board, and prevent it from falling before the five-in-one connector is tightened.

Step Seven: connect and fix the middle board of desktop

	M6*40 Flat-head Cross Screw 8pcs
--	----------------------------------

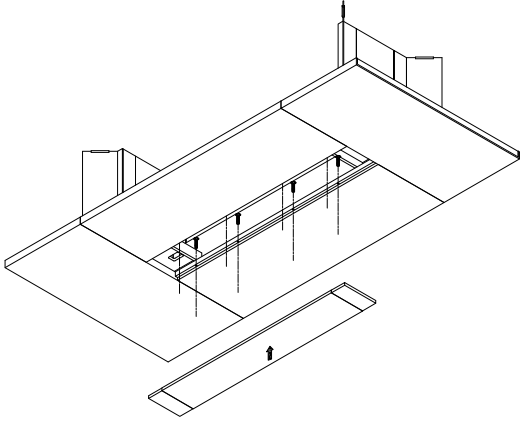

Step Eight: fix the understructure, connecting boards and desktop

	Leg Support 8 sets
	M6*17 Countersunk Allen Screw 24pcs

