

Instruction for Use

Q/SAYF-BD051V1.0

This product mainly uses artificial board as base material and natural wood veneer overlaying the surface finishing. Some of the lines and the framework use solid wood processing and hardware for connection and for overall plate structures. This product meets the standard GB/T 3324-2017, which defines that its formaldehyde release quantity and soluble heavy metals (paint) limited are in accordance with national standards.

Please read and follow the guidance of the instructions for proper use and maintenance of your furniture so as to maintain their sound condition after many years of use. Please pay attention to the following instructions when you use your furniture:

- Don't locate the furniture directly under sunlight or anywhere near air-conditioners or heaters, because ultraviolet ray will cause color fading in the surface of furniture, peeling-off of strips or even deformation.
- Don't incline the furniture towards any direction, or the connectors will be loosened or even broke off.
- Don't place hot or frozen objects on the furniture directly, or it may cause color fading in the surface of furniture and unmovable stains.
- Don't move objects right on the surface of the furniture, or it may scratch the surface.
- Please lift the furniture a little bit off the ground when it needs to be moved as a whole so as to avoid the damage to the bottom part or the connectors of the furniture.
- If you need to put heavy or hard objects on the furniture, we advice you to put a soft cloth mat on the surface for protection purpose.
- Do not put plastic or rubber items on the surface of the furniture for too long. The chemical composition may cause damage to the furniture.
- Please use soft cotton cloth or feather duster to remove the dust. Please use special furniture cleaner when remove oil or other stains. Please avoid chemical or acid cleaner.
- If not in use for a longer period, the furniture should be covered with dust cover, stored indoor in a dry, dark and ventilated environment.

If your product has been updated, please leave the old version to the qualified recycling company or enterprises involved in recycling business.

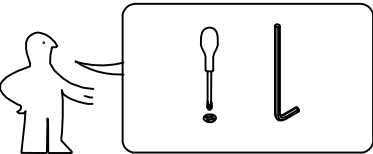
Trouble Shooting

Problems	Analysis	Solutions
The hinge is loose.	The screws are loose.	Tighten the screws
The door cannot be opened smoothly.	Furniture is not levelly put or there is a problem with hinges.	Put the furniture evenly on the floor or adjust the hinge, and add little lubricating oil
Drawers cannot be opened smoothly.	Overloaded, and result in lack of lubricating oil.	Reduce the weight and add some lubricate oil on rails.
Desktop whitened.	Resulted from high temperature.	Cover the white place with a wet towel until the color is back to normal.
The connector is loose.	The eccentric connection part is loose.	Tighten the connection part.
Shelf distorts.	Overloaded.	Reduce the weight, and assemble the shelf board reversely.

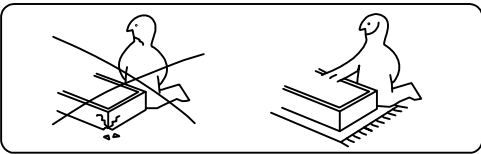
Assembly Instruction

- Please decide the location of your furniture before installation to avoid moving them in a large scale after it is completely installed.
- Do not place your furniture in dark and damp or hot and dry environment.
- Please check the number of packaging bags, view the product installation manual and verify the product structure.
- Please check the direction of each part when unpacking them before installation.
- Please install the product patiently. Make sure that each part is in the right position. Furniture is easy to assemble, but it takes patience and carefulness to do a meticulous job.
- Please check the stability of the furniture after installation. Shake your furniture gently to confirm whether it is level with the ground or whether the screw is tight.
- Please keep the furniture unoccupied for a period of time. Open the cabinet and drawer to release residual painting odor.

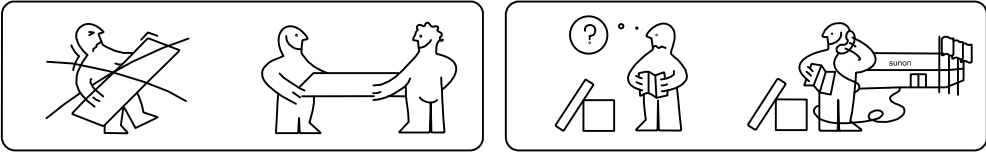
Attention



① Move it safely with cooperation.



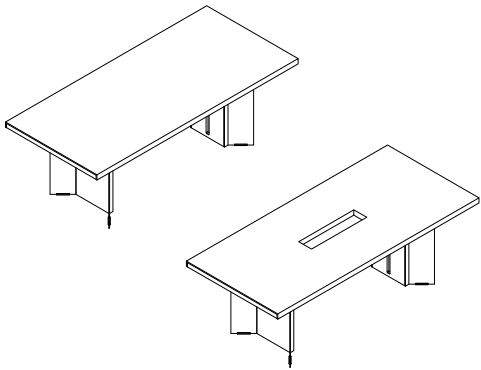
② Handle it with care. Please locate it on a protection layer.



③ If you have any questions, please contact us.

Sunon

Thank you for choosing Sunon products. Please read the instruction carefully before using.



Product Information

Series: Larry
Item: EY78/EY78H
Name: Meeting Table
Dimension: 2200*1000*750

This product is suitable for office use only, and the decorative accessories is for indoor use only.

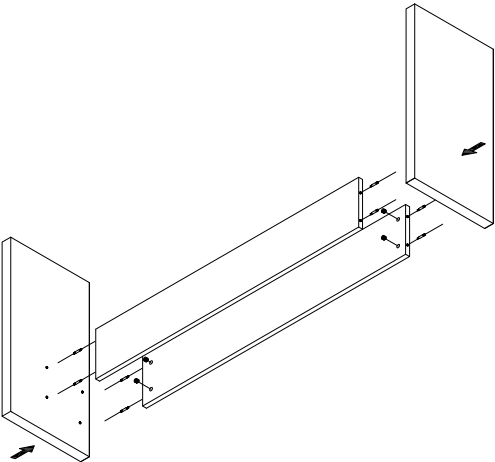
Zhejiang Sunon Furniture Manufacture Co., Ltd

Customer service hotline: 4008-600-666
Website: www.sunon-china.comHeadquarters Address: Sunon Central Buisness Building, No. 200 Citizen Street, Qianjiang CBD, Hangzhou, Zhejiang
Manufacturing Base Address: 35th, Ningdong Road, Xiaoshan economic and technological development zone, Hangzhou, Zhejiang
Manufacturing Base Address: 6th Anren Road, Jianshan Haining economic development zone, Zhejiang

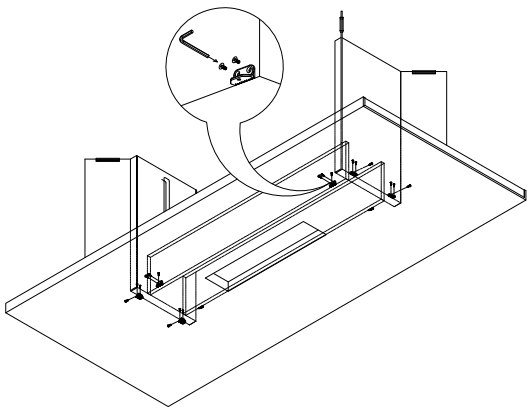
Fittings

				
Ø15*32 Three-in-one connector 8 sets	700*145*181 Iron Plate 4pcs	100*13*10 Plastic Leg Pad 4pcs	4# Allen Wrench 1 pc	M6*12 Countersunk Allen Screw 16pcs
				
Irregular Shape Leg Support 8 sets	M6*17 Countersunk Allen Screw 24pcs	EM78H.2200 Under-Desk Cable Box 1 set	EM78H.2200 Double-door Cable Box 1 set	
				
EM78H.2200 M6*12 Flat-head Cross Screw 6pcs				

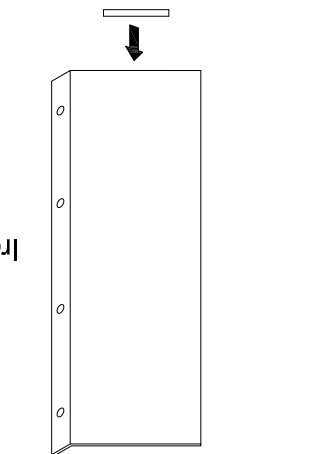
Step One: connect and fix the two connecting boards with two leg boards

	 Three-in-one connector 8 sets
--	---

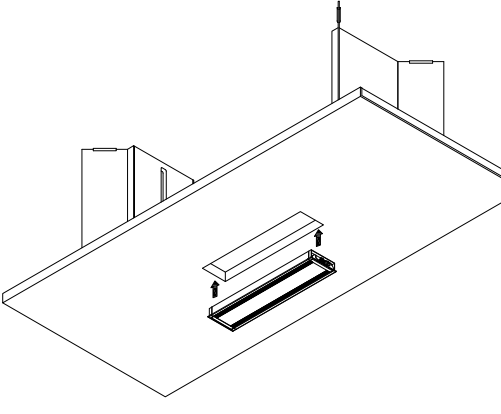
Step Five: fix the understructure, connecting boards and desktop

	 Leg Support 8 sets M6*17 Countersunk Allen Screw 24pcs
---	---

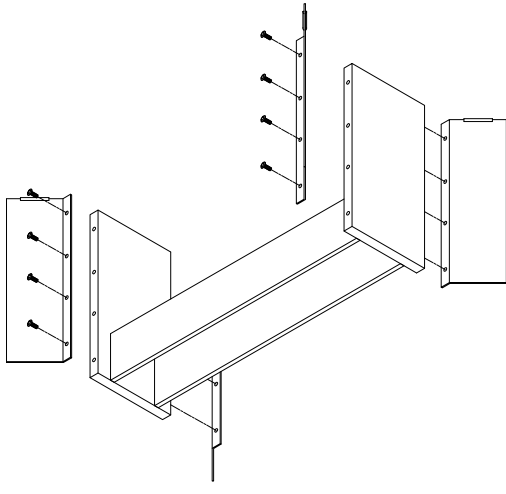
Step Two: assemble the iron plates and plastic leg pad as below picture shows

	 Iron Plate 4pcs 100*13*10 Plastic Leg Pad 4pcs
--	---

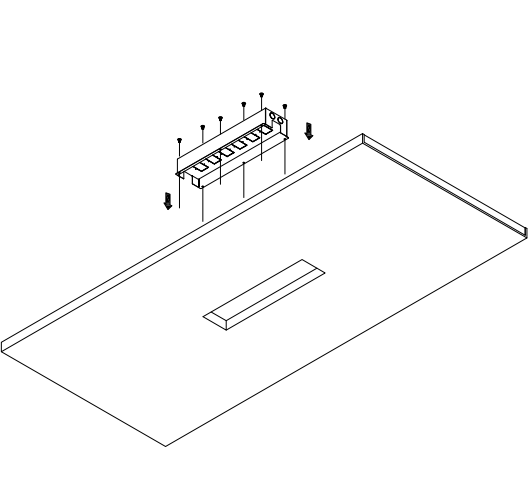
Step Six: fix the double-door wire box with desktop (this step only applies to EY78H.2200)

	 Double-door Cable Box 1 set
---	---

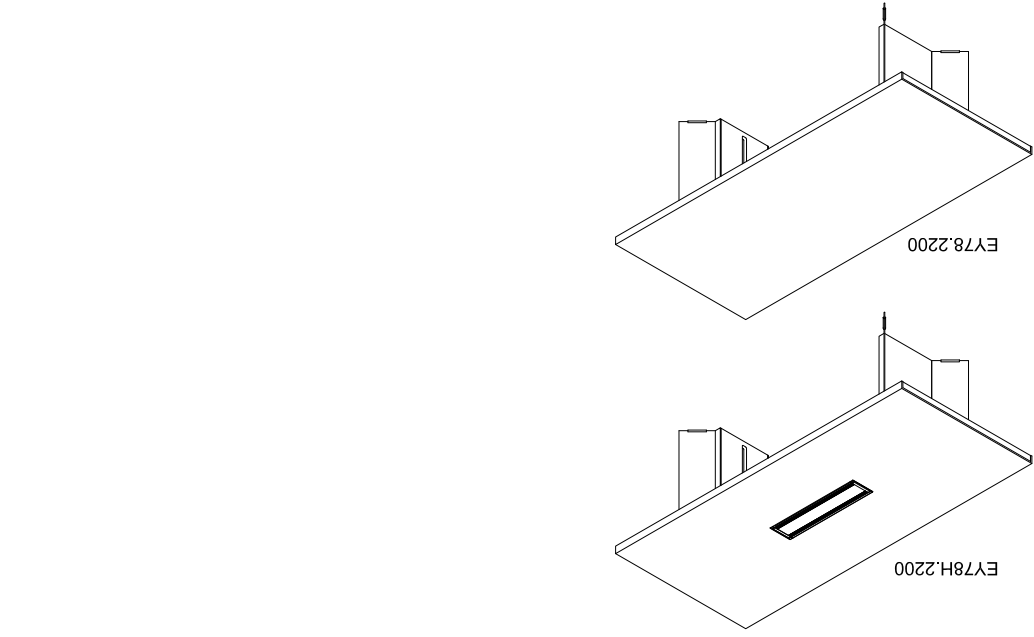

Step Three: connect and fix the iron plates with leg boards

	 Allen Wrench 1 pc M6*12 Countersunk Allen Screw 16pcs
---	---

Step Four: fix the under-desk cable box with desktop (this step only applies to EY78H.2200)

	 Under-Desk Cable Box 1 set M6*12 Flat-Head Cross Screw 6pcs
---	--

Step Seven: Assembly finished.

	 EY78H.2200
--	--